


SPECIFICATION SHEET

Kraft Back

250 to 500 GSM

(ON LINE COATED BOARD) M/C Deckle-365-370cms

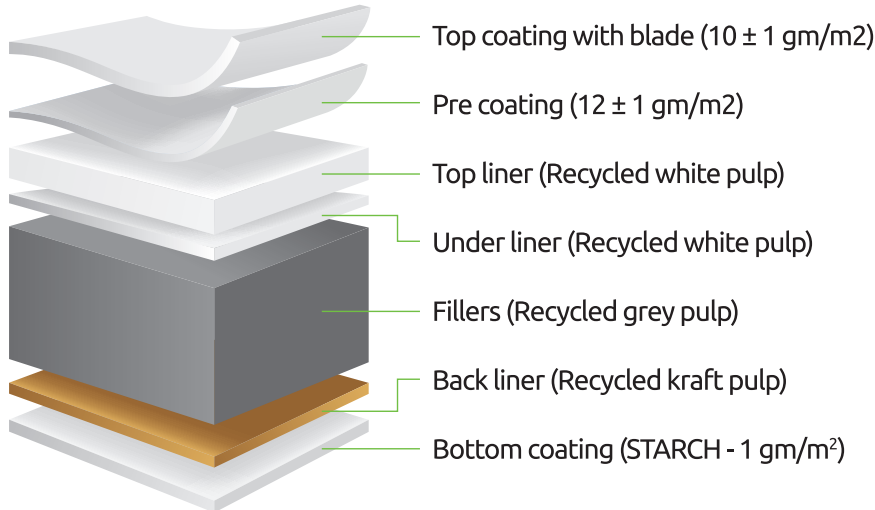

Application

1. Packaging board
2. High speed printing job

Recommended for Multi-color printing

1. Letter press
2. Offset
3. Rotogravure

Substance	Stiffness (Taber)			Caliper	Bulk	Parameters		
gm/m ²	T 489 om-99			Micron	cc/gm.	Roughness - PPS	Microns	2.5±0.5
	MD	CD	GM			T 555 om - 99		
250	70	32	47	310	1.24	Brightness Top	%	76±1
300	125	54	82	366	1.25	T 452 om - 98		
320	150	62	96	400	1.25	Gloss at 75	%	40±3
330	160	67	104	416	1.26	T 480 om - 99		
350	190	82	125	445	1.27	Plybond (scott)	Jules	>130
360	200	86	131	457	1.27	Tappi : T-833		
400	260	113	171	520	1.30	IGT Dry Pick	(m/sec)	>1.0
420	280	121	184	546	1.30	ISO 3782		
450	340	147	224	585	1.30	COBB Top	g/m ²	35-50
500	360	165	244	650	1.30	Bottom		50-100
						T 441 om - 98		
						Smoothness-Bendtsen	ml/min	50-80
						ISO-8791-2		
						Burst Factor	-	16±2
						Tappi T807		
Tolerance						Moisture Content	%	7.5%±1.0%
±3%	±10%			±5%	±5%	Tappi T412 om 02		